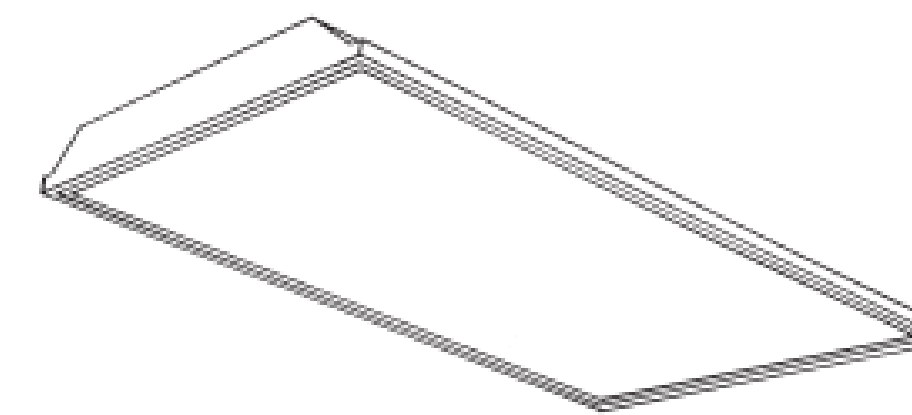


LIGHTING FIXTURE SCHEDULE															
TYPE LETTER	FIXTURE TYPE	FLOOR.	INCAND.	METAL HAL.	H.P.S.	LAMPS	WATTS	VOLTS	MOUNTING	LIGHT CONTROL	BALLASTS	MFR	CATALOG NO.	APPLICATIONS	NOTES
A	2 X 4 DIRECT/INDIRECT	X				2-32W T8	64	UNV	RECESSED	50% OPEN PERFORATION .125"ACRYLIC DIFFUSER	ELECTRONIC BALLASTS, RAPID START	HEW LIGHTING, APPROVED EQUAL	DI SERIES	CORRIDOR, DAY ROOM	2
B	2 X 4 LENSED TROFER	X				3-32W T8	96	UNV	RECESSED	.125"ACRYLIC PRISMATIC LENS	ELECTRONIC BALLASTS, RAPID START	DAY-BRITE, APPROVED EQUAL	2TG8 SERIES	OFFICES	2
B1	2 X 4 LENSED TROFER	X				2-32W T8	64	UNV	RECESSED	.125"ACRYLIC PRISMATIC LENS	ELECTRONIC BALLASTS, RAPID START	DAY-BRITE, APPROVED EQUAL	2TG8 SERIES	PATIENT ROOMS	2
C	TOILET MIRROR LIGHT 22"	X				2-24W T5HO	48	UNV	WALL SURFACE	MATE WHITE ACRYLIC LENS	ELECTRONIC BALLASTS, RAPID START	DAY-BRITE, APPROVED EQUAL	AVW SERIES	PATIENT BATHROOMS	2
C1	TOILET MIRROR LIGHT 36"	X				2-39W T5HO	78	UNV	WALL SURFACE	MATE WHITE ACRYLIC LENS	ELECTRONIC BALLASTS, RAPID START	DAY-BRITE, APPROVED EQUAL	AVW SERIES	STAFF BATHROOMS	2
E	EXIT SIGN					L.E.D	2.5	UNV	UNIVERSAL	RE-STENCIL LETTERS BRUSCHED ALUMINUM FACE MATE, BLACK HOUSING		MCPHILBEN, APPROVED EQUAL	55L2R	CORRIDORS	1,2
H	HEADWALL LIGHT	X				2-28W T5 UP/ 2-32W T5 DOWN	56	UNV	WALL SURFACE	STEEL HOUSING BAKED WHITE ENAMEL ACRYLIC LENS (UP) PRISMATIC ACRYLIC LENS (DOWN) WITH LOW VOLTAGE CONTROLLER	ELECTRONIC BALLASTS, RAPID START	ALKO, APPROVED EQUAL	HZN SERIES	PATIENT ROOMS	2
N	NIGHT LIGHT					L.E.D	6	UNV	RECESSED IN WALL	STEEL HOUSING DIRECTIONAL LOUVER AND SWITCH		ALKO, APPROVED EQUAL	SO4N-2/SWH	PATIENT ROOMS	2
P	COVE LIGHT 4"	X				1-54W T5HO	54	UNV	WALL SURFACE	GALVANIZED STEEL HOUSING WITH ASYMMETRICAL SPECULAR REFLECTOR	ELECTRONIC BALLASTS, RAPID START	DAY-BRITE, APPROVED EQUAL	CV SERIES	ELEVATOR LOBBY	2
S	SHOWER LIGHT	X				1-32W TT	32	UNV	RECESSED	POLYCARBONATE LENS FULLY GASKETED UL WET LABEL	ELECTRONIC BALLASTS, RAPID START	KIRLIN, APPROVED EQUAL	CFR6V32 SERIES	PATIENT BATHROOMS	2
T	1 X 4 INDUSTRIAL STRIP	X				2-32W T8	64	UNV	SURFACE	5% UPLIGHT REFLECTOR	ELECTRONIC BALLASTS, RAPID START	DAY-BRITE, APPROVED EQUAL	1A SERIES	EQUIPMENT ROOM 7E37	2

GENERAL NOTES:

1. REFER TO DRAWINGS FOR FACE QUANTITIES AND CHEVRON ARROWS INDICATORS.
2. FIXTURE SHALL BE PROVIDED WITH A SIMPLE DISCONNECT FOR MAINTENANCE.

[illegible]